

DH-IPC-HFW3200C

2Megapixel Full HD Network IR-Bullet Camera



Features

- 1/3" 2Megapixel progressive scan Exmor CMOS
- H.264 & MJPEG dual-stream encoding
- 25/30fps@1080P(1920×1080)
- DWDR, Day/Night(ICR), 2DNR, Auto iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.3-12mm varifocal lens
- Built-in 2/1 alarm in/out
- Max. IR LEDs length 20m
- Micro SD memory, IP66, PoE

DH-IPC-HFW3200C


Specifications

Model		DH-IPC-HFW3200CP	DH-IPC-HFW3200CN
Camera			
Image Sensor		1/3" 2Megapixel Exmor CMOS	
Effective Pixels		1920(H)x1080(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual, 1/3~1/10000s	Auto/Manual, 1/4~1/10000s
Min. Illumination		Color: 0. 2Lux/F1.2, B/W: 0.01Lux/F1.2; 0Lux/F1.2(IR on)	
S/N Ratio		> 50dB	
Video Output		1 channel, BNC(1.0Vp-p/75Ω)	
Camera Features			
Max. IR LEDs Length		20m	
Day/Night		Auto(ICR)/Color/B/W	
Backlight Compensation		BLC / HLC / DWDR	
White Balance		Auto	
Gain Control		Auto/Manual	
Noise Reduction		2D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		3.3-12mm	
Max Aperture		F1.4	
Focus Control		Manual	
Angle of View		H: 79.3°(Wide)~29.8°(Tele)	
Lens Type		Manual / Auto Iris (DC)	
Mount Type		Board-in Type	
Video			
Compression		H.264 / MJPEG	
Resolution		1080P(1920×1080) / 720P(1280×720) / D1(704×576) / CIF(352×288) /	1080P(1920×1080) / 720P(1280×720) / / D1(704×480) / CIF(352×240)
Frame Rate	Main Stream	1080P/720P(1 ~ 25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
Bit Rate		H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 20480Kbps	
Audio			
Compression		G.711a / G.711u(64kbps) / PCM(128kbps)	
Interface		1/1 channel In/Out	
Network			
Ethernet		RJ-45 (10/100Base-T)	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
ONVIF		ONVIF Ver. 2.0	

DH-IPC-HFW3200C

Max. User Access	10 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 32GB
Alarm	2/1 channel In/Out
General	
Power Supply	DC12V(AC24 optional), PoE(802.3af)
Power Consumption	<10W
Working Environment	-10°C~+60°C, 10%~90%
Ingress Protection	IP66
Dimensions	φ104mm × 306.7mm
Weight	1.25Kg

Dimensions (mm)

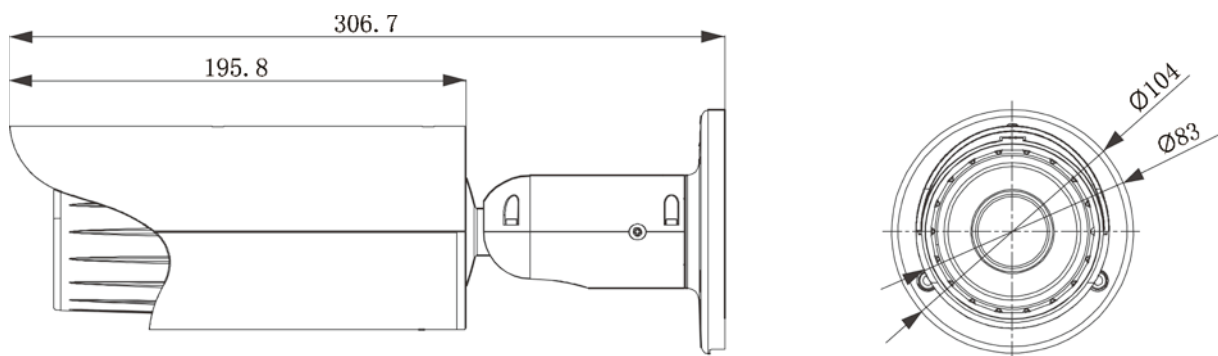

<http://www.asi.ind.in>

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email:overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.